


»amg» International
The Stent Company

ITRAC


Guidewire with
optimal performance

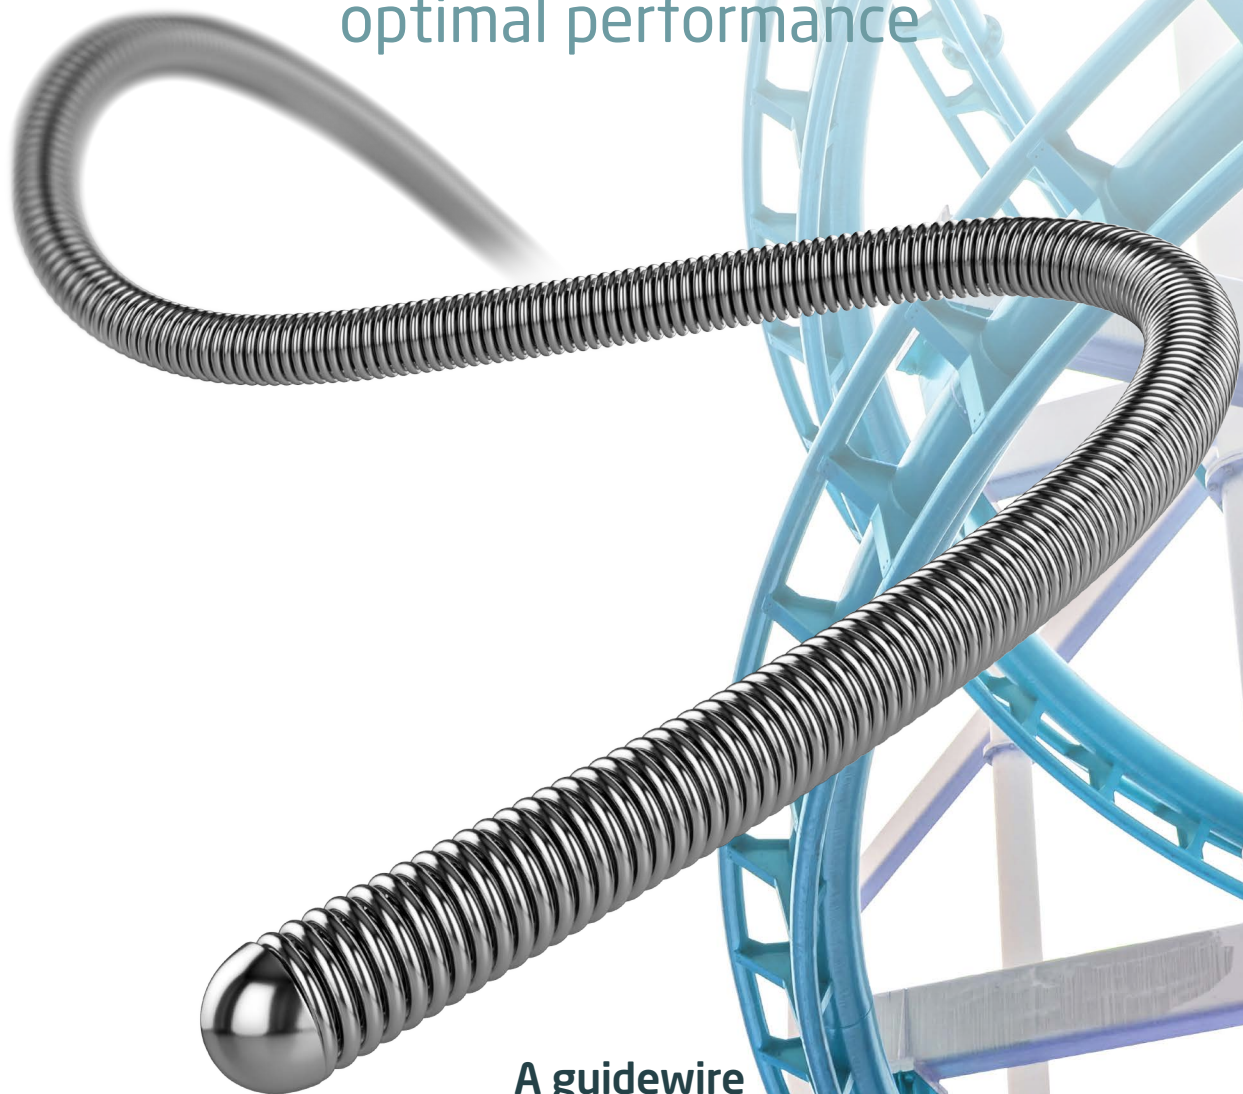

A guidewire
you can rely on

ITRAC


Guidewire with optimal performance

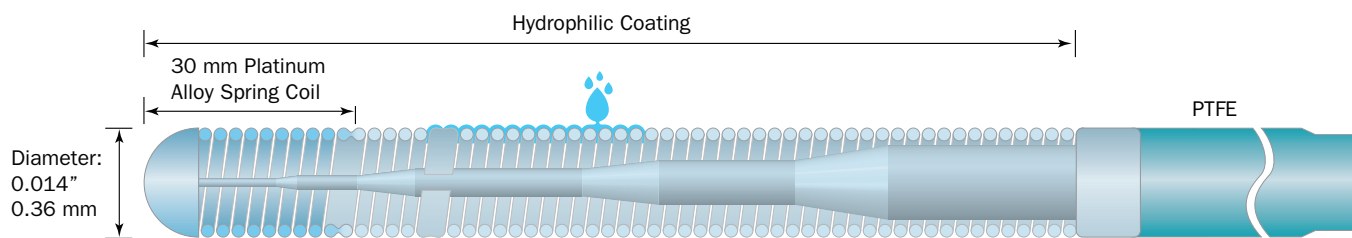

KEY FEATURES

- Tapered Shaping Ribbon** The distal portion of the core incorporates a tapered section from the round central core into the flat portion.
- Coating** amg offers a hydrophilic coating on the distal coiled section of the guidewire, which does not cause binding of the guidewire with the balloon catheter. Additionally we provide a PTFE coating on the shaft. That means a minimization of friction and an excellent catheter movement.
- Radiopacity** Excellent radiopacity properties due to 3cm long wound platinum alloy coil at distal tip.
- Stiffness Profiles** The ITRAC wires have a range of stiffness options varying from Extra-Floppy to Standard Extra Support, exhibiting best performances in comparison to competitors. The amg guidewire gives the smoothest transition of stiffness over the distal 25cm.

STIFFNESS GRADING

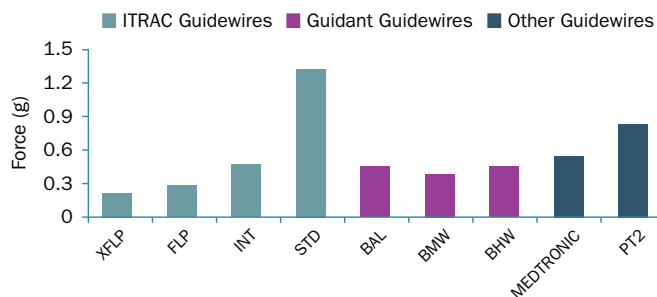

Tip Stiffness Results indicating the broad range of options available with the amg ITRAC wire

TECHNICAL SPECIFICATIONS

Usable length	195 cm
Diameter	0.014" (0.36mm)
Length distal part	300 mm
Length platinum alloy distal spring coil	30 mm
Diameter distal coil	0.0133"
Core material	Stainless steel PTFE coated
Distal coil	Platinum alloy
Proximal coil material	Stainless steel
Coating	Hydrophilic
Sterilization	Sterilized with ethylene oxide gas

ORDER INFORMATION

Overall Length 195 cm

Product code	Core Profile	Core Support	Tip Profile
600-000-010	Extra Floppy	Normal	Straight
600-100-010		Extra Support	Straight
601-000-010	Floppy	Normal	Straight
601-100-010		Extra Support	Straight
602-000-010	Intermediate	Normal	Straight
602-100-010		Extra Support	Straight
603-000-010	Standard	Normal	Straight
603-100-010		Extra Support	Straight

Packaging: Dispenser and pouches; 5 pieces each per carton, sterile.

CE 0050

»amg»
International
The Stent Company

amg International GmbH
Boschstraße 16
D-21423 Winsen
Germany

Phone +49 4171 6905 57-0
Fax +49 4171 6905 57-11
Email info@thestentcompany.com
Web www.thestentcompany.com

Status
October 2017
PS ITRAC_04